





COPPER

Category 8 Solution	23
Field Term. Plug	25
Keystone Jack	31
In-Line Coupler	40
Trunk	41
Patch Cord	42
Easy Tool	46
Patch Panel	47
Cable	50
Category 6A Solution	53
Category 7 Solution	54
28AWG Solution	55

FTP Field Term. Plug, Snap-in Boot

IP20 FTP Field Term. Plug, Screw-in Boot

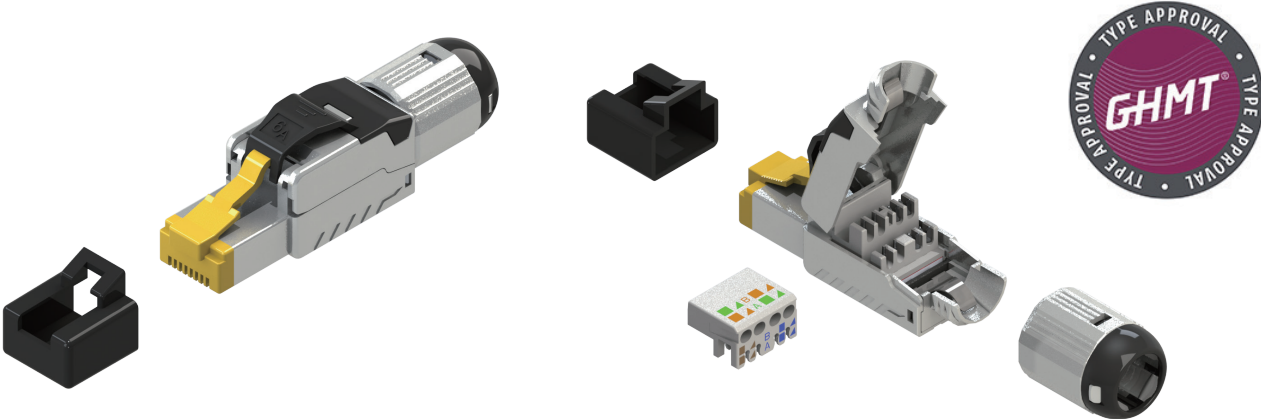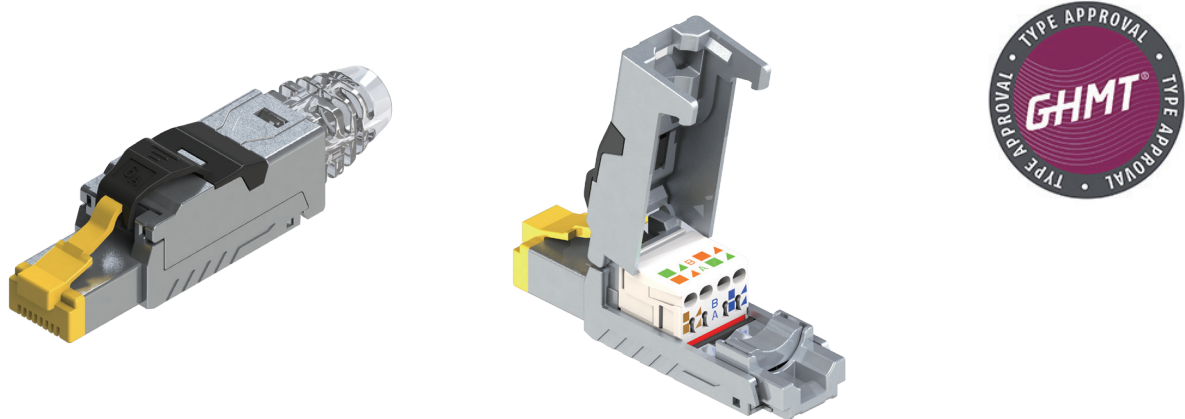

Features

- GHMT verified CAT8 channel class I performance
- GHMT verified IEC60512-99-002 PoE type III 60W and IV 100W capability
- IEEE802.3bt type III and IV application
- CAT8 design to support Ethernet at rates up to 40 Gbps (40GBASE-T) and 25Gbps(25GBASE-T) over distances up to 30 meters for switch-to-server connections in data center
- Power over HDBaseT (PoHDBaseT - up to 100W) application
- High quality connectors ensure system reliability and stability by press-fit assembly process
- CAT6A patch cord component-rated
- IEC60603-7 dimensions and structural reliability complied

Features

- GHMT verified CAT8 channel class I performance
- GHMT verified IEC60512-99-002 PoE type III 60W and IV 100W capability
- IEEE802.3bt type III and IV application
- CAT8 design to support Ethernet at rates up to 40 Gbps (40GBASE-T) and 25Gbps(25GBASE-T) over distances up to 30 meters for switch-to-server connections in data center
- Power over HDBaseT (PoHDBaseT - up to 100W) application
- High quality connectors ensure system reliability and stability by press-fit assembly process
- CAT6A patch cord component-rated
- IEC60603-7 dimensions and structural reliability complied
- IP20 protection by dust-cap and screw-in boot design

Applications

Applications

Wire Gauge (AWG)	Wire O.D. (mm)	Cable O.D. (mm)
26/7 – 23/1	1.0 - 1.45	6.0 - 7.5
24/7 – 22/1	1.2 - 1.65	7.0 - 8.5

Wire Gauge (AWG)	Wire O.D. (mm)	Cable O.D. (mm)
26/7 – 23/1	1.0 - 1.45	6.0 - 7.5
24/7 – 22/1	1.2 - 1.65	7.0 - 8.5

Part No.	Description
FP-C6A-FS	CAT6A FTP, patch cord component-rated, snap-in boot type
FP-C8-FS	CAT8 FTP, channel level, snap-in boot type

Part No.	Description
FPS-C6A-FS	CAT6A FTP, patch cord component-rated, screw-in boot type
FPS-C8-FS	CAT8 FTP, channel level, screw-in boot type


Suitable for easy crimping tool
JE P/N: ETC-B



Suitable for easy crimping tool
JE P/N: ETC-B



IP20 FTP 5-direction Field Term. Plug

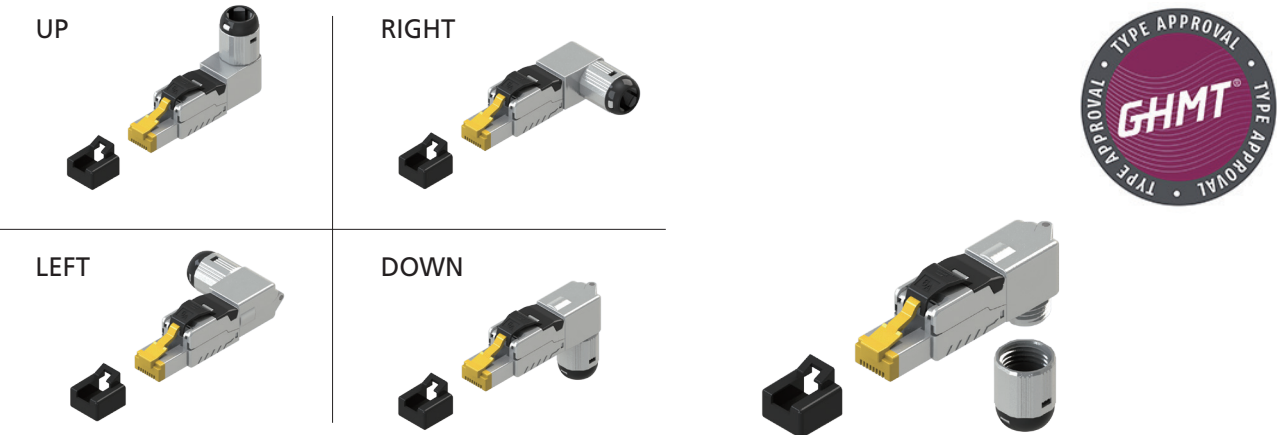

Features

- 5-direction cable entry design
- GHMT verified CAT8 channel class I performance
- GHMT verified IEC60512-99-002 PoE type III 60W and IV 100W capability
- IEEE802.3bt type III and IV application
- CAT8 design to support Ethernet at rates up to 40 Gbps (40GBASE-T) and 25Gbps(25GBASE-T) over distances up to 30 meters for switch-to-server connections in data center
- Power over HDBaseT (PoHDBaseT - up to 100W) application
- High quality connectors ensure system reliability and stability by press-fit assembly process
- CAT6A patch cord component-rated
- IEC60603-7 dimensions and structural reliability complied
- IP20 protection by dust-cap and screw-in boot design

Applications


Wire Gauge (AWG)	Wire O.D. (mm)	Cable O.D. (mm)
26/7 – 23/1	1.0 - 1.45	6.0 - 7.5
24/7 – 22/1	1.2 - 1.65	7.0 - 8.5

Part No.	Description
FPA-C6A-FS	CAT6A FTP, patch cord component-rated, 5-direction, screw-in boot type
FPA-C8-FS	CAT8 FTP, channel level, 5-direction, screw-in boot type



Suitable for easy crimping tool
JE P/N: ETC-B

UTP Field Term. Plug, Push to Crimp type

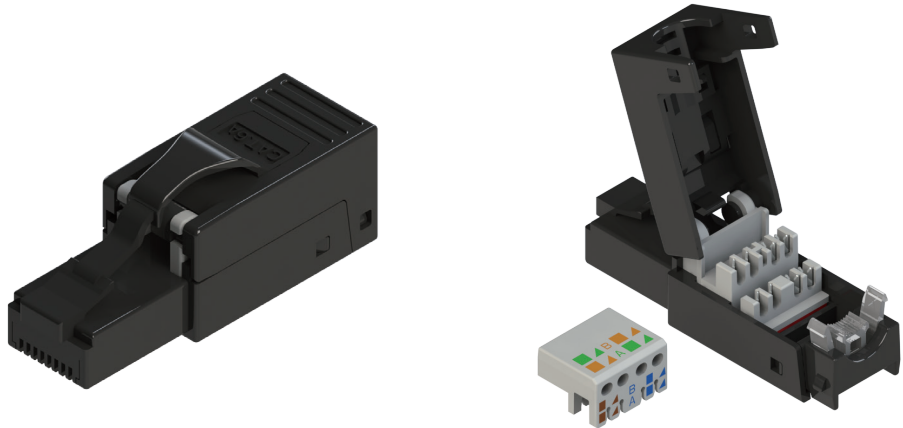

Features

- IEC60512-99-002 PoE type III 60W and IV 100W capability
- IEEE802.3bt type III and IV application
- CAT6 and CAT6A patch cord component-rated and channel performance
- Power over HDBaseT (PoHDBaseT - up to 100W) application
- High quality connectors ensure system reliability and stability by press-fit assembly process
- IEC60603-7 dimensions and structural reliability complied
- L x W x H: 42.8 x 14.0 x 17.5mm

Applications

Wire Gauge (AWG)	Wire O.D. (mm)	Cable O.D. (mm)
23/1-26/7	1.0 – 0.8	7.5 – 5.0

Part No.	Description
FPP-C6-US	CAT6 UTP, patch cord component-rated
FPP-C6A-US	CAT6A UTP, patch cord component-rated

UTP Field Term. Plug



Features


- IEC60512-99-002 PoE type III 60W and IV 100W capability
- CAT6 and CAT6A patch cord component-rated and channel performance
- Power over HDBaseT (PoHDBaseT - up to 100W) application
- High quality connectors ensure system reliability and stability by press-fit assembly process
- IEC60603-7 dimensions and structural reliability complied
- L x W x H: 47.6 x 14.0 x 16.6mm

Applications

Wire Gauge (AWG)	Wire O.D. (mm)	Cable O.D. (mm)
23/1-26/7	1.0 – 0.8	5.9 – 4.4

Part No.	Description
FP-C6-US	CAT6 UTP, patch cord component-rated
FP-C6A-US	CAT6A UTP, patch cord component-rated

Rotatable UTP Field Term. Plug

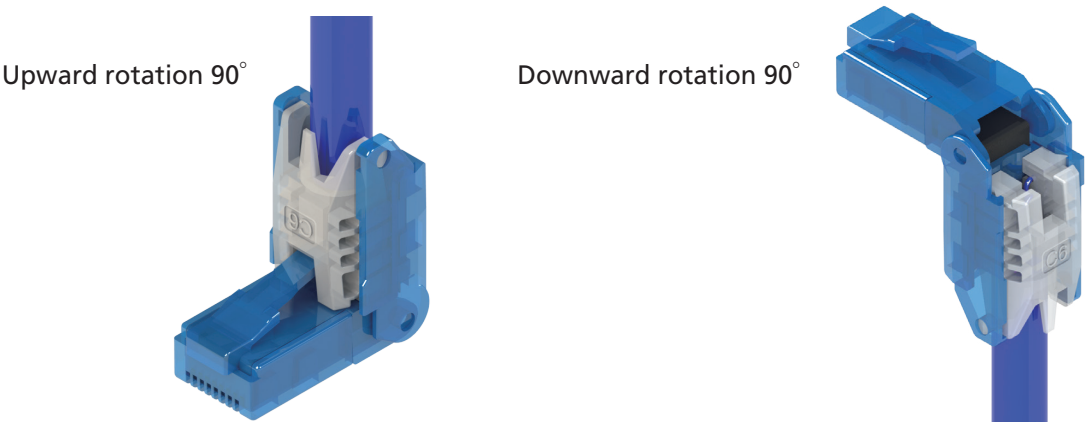


Features

- Simple-to-attach plug for field termination
- IEC60512-99-001 PoE plus 30W capability
- IEEE802.3at application
- CAT6 patch cord component-rated and channel performance
- IEC60603-7 dimensions and structural reliability complied
- Max. width: 14mm


Applications

Wire Gauge (AWG)	Wire O.D. (mm)	Cable O.D. (mm)
24/1-26/7	0.9 – 0.8	5.6 – 5.0

Part No.	Description
FPR-C6-US	CAT6 UTP, patch cord component-rated, rotatable

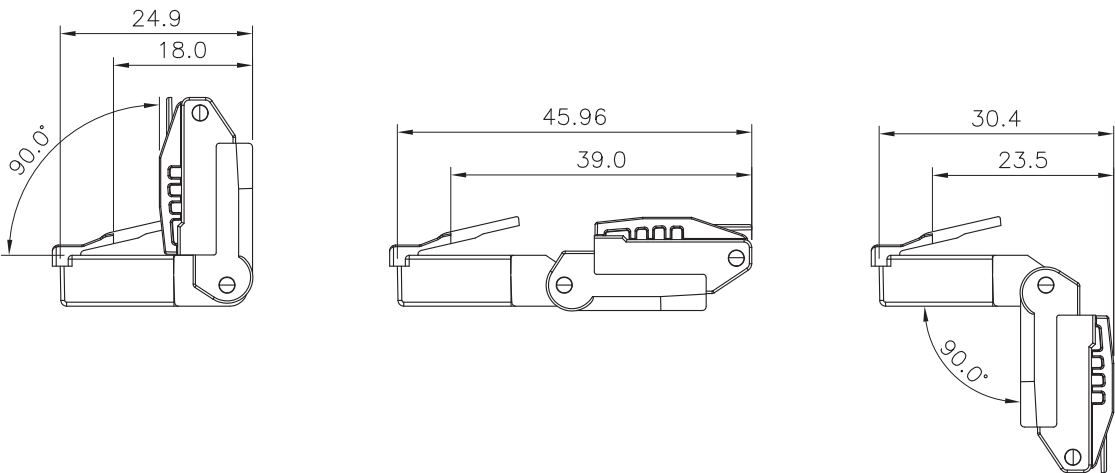

FTP Keystone Jack

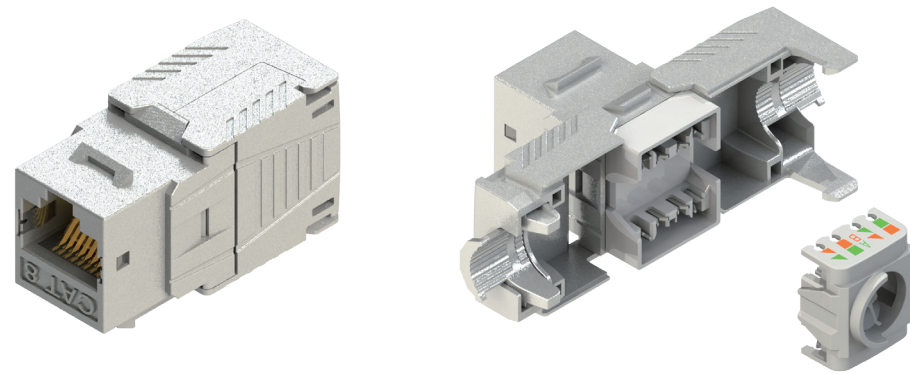

Features

- GHMT verified CAT8 channel performance
- DELTA verified ISO CAT6A component-rated performance
- GHMT verified IEC60512-99-002 PoE type III 60W and IV 100W capability
- IEEE802.3bt type III and IV application
- CAT8 design to support Ethernet at rates up to 40 Gbps (40GBASE-T) and 25Gbps(25GBASE-T) over distances up to 30 meters for switch-to-server connections in data center
- Power over HDBaseT (PoHDBaseT - up to 100W)
- High quality connectors ensure system reliability and stability by press-fit assembly process
- IEC60603-7 dimensions and structural reliability complied
- Accepts JE 1U 24-Port and 1U 48-Port keystone panel
- L x W x H: 37.4 x 16.5 x 22.5mm

Applications

Wire Gauge (AWG)	Wire O.D. (mm)	Cable O.D. (mm)
26/7 – 23/1	1.0 - 1.45	6.0 - 7.5
24/7 – 22/1	1.2 - 1.65	7.0 - 8.5

Part No.	Description
KJ58F-C6A-FS	CAT6A FTP, component-rated, tool-less type
KJ58F-C8-FS	CAT8 FTP, channel level, tool-less type

Suitable for easy crimping tool
JE P/N: ETC-C



Compliance Statement

No. 2017-805

Connecting Hardware, Category 6A

Company

Jyh Eng Technology Co., Ltd.
5FL. No. 11, Lane 1, Sec. 1, Yung-An s. Road
Lujou City, New Taipei City
Taiwan 247
R.O.C.

Product description

Screened Category 6A RJ45 connector characterised up to 500 MHz, 100 Ω

Product identification

KJ58F-C6A-FS

Generic cabling and cabling components standards - Category 6A connector requirements

- ISO/IEC 11801:2011 (Ed. 2.2)
- IEC 60603-7-51:2010
- EN 50173-1:2011
- EN 50173-2:2007 including amendment A1:2010
- ANSI/TIA-568-C.2:2009

including all connector alien crosstalk parameters (PS ANEXT and PS AFEXT)

Technical report

DELTA-T732078, DANAK-19/18370

EC Cabling product ID


6462

CS valid until

1 November 2018

This product has been tested by DELTA EC Cabling Group and complies with the electrical requirements of the above specified standards and "Terms and conditions for the EC VERIFIED programme for Generic and Coaxial Cabling", DQP231006. The testing included measurement of NEXT with a compliant test plug and calculation of all the 14 test cases in both measurement directions. The product takes part in a maintenance of certification schedule, which implies that DELTA EC Cabling performs a quality audit of the manufacturer's production and QA sites. The maintenance testing of the product is performed on a sample basis once a year.

Hørsholm, 9 October 2017


Lars Lindskov Pedersen
Test Manager


Dennis Andersen
Head of Department


DELTA – a part of FORCE Technology

Venlighedsvej 4
2970 Hørsholm
Denmark

Tel. +45 72 19 40 00
Fax +45 72 19 40 01
www.madebydelta.com/cable



180° Keystone Jack

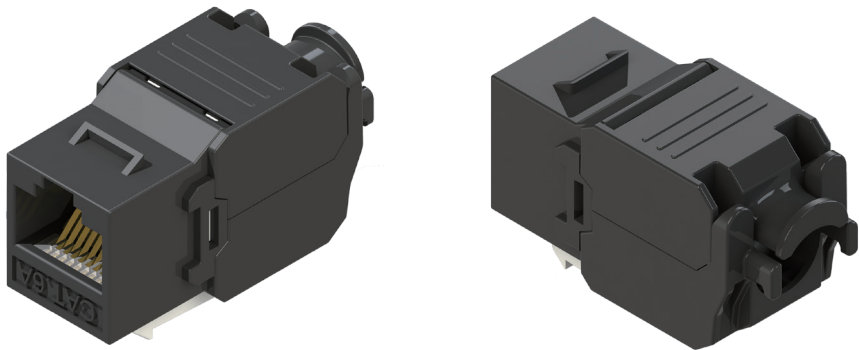


Features

- UL safety listed
- DELTA and ETL verified CAT6 and CAT6A component-rated performance
- DELTA verified IEC60512-99-001 PoE plus 30W
- IEC60512-99-002 PoE type III 60W and IV 100W capability
- IEEE802.3bt type III and IV application
- Power over HDBaseT (PoHDBaseT - up to 100W)
- High quality connectors ensure system reliability and stability by automation line
- IEC60603-7 dimensions and structural reliability complied
- Fits 1U 24-Port keystone panel
- Suitable for JE easy crimping tool , JE P/N: ETC-A
- L x W x H: 37.8 x 16.8 x 22.7mm

UTP Tool-less type

Part No.	Description
KJ28F-C6-US-XX	CAT6 component-rated, accepts 23-26AWG
KJ28F-C6A-US-XX	CAT6A component-rated, accepts 23-26AWG
KJ28F-C6-US-XX-22	CAT6 component-rated, accepts 22-23AWG
KJ28F-C6A-US-XX-22	CAT6A component-rated, accepts 22-23AWG
KJ28F-C6-US-XX-28	CAT6 component-rated, accepts 28AWG
KJ28F-C6A-US-XX-28	CAT6A component-rated, accepts 28AWG

180° Keystone Jack

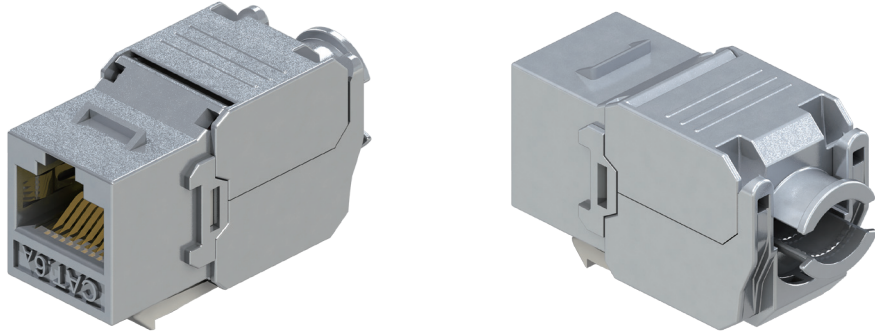


Features

- UL safety listed
- DELTA and ETL verified CAT6 and CAT6A component-rated performance
- DELTA PoE plus 30W IEC60512-99-001 verified
- IEC60512-99-002 PoE type III 60W and IV 100W capability
- IEEE802.3bt type III and IV application
- Power over HDBaseT (PoHDBaseT - up to 100W)
- High quality connectors ensure system reliability and stability by automation line
- IEC60603-7 dimensions and structural reliability complied
- Fits 1U 24-Port keystone panel
- Suitable for JE easy crimping tool , JE P/N: ETC-A
- L x W x H: 37.8 x 16.0 x 22.7mm

FTP Tool-less type

Part No.	Description
KJ28F-C6-FS	CAT6 component-rated, accepts 23-26AWG
KJ28F-C6A-FS	CAT6A component-rated, accepts 23-26AWG
KJ28F-C7-FS-22	CAT7 channel-rated, accepts 22-23AWG
KJ28F-C6-FS-22	CAT6 component-rated, accepts 22-23AWG
KJ28F-C6A-FS-22	CAT6A component-rated, accepts 22-23AWG
KJ28F-C6-FS-28	CAT6 component-rated, accepts 28AWG
KJ28F-C6A-FS-28	CAT6A component-rated, accepts 28AWG

180° Keystone Jack

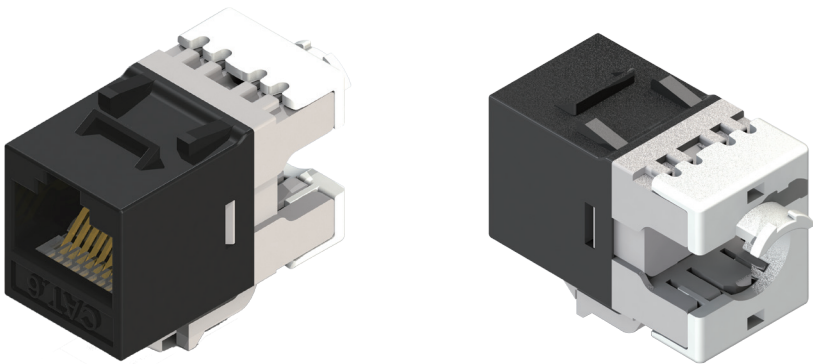


Features

- UL safety listed
- DELTA and ETL verified CAT6 and CAT6A component-rated performance
- DELTA PoE plus 30W IEC60512-99-001 verified
- IEC60512-99-002 PoE type III 60W and IV 100W capability
- IEEE802.3bt type III and IV application
- Power over HDBaseT (PoHDBaseT - up to 100W)
- High quality connectors ensure system reliability and stability by automation line
- IEC60603-7 dimensions and structural reliability complied
- Fits 1U 24-Port, 1U 48-Port and 0.5U 24-Port keystone panel
- Suitable for 110 and KRONE punch-down tool
- L x W x H: 31.6 x 14.5 x 21.8mm

UTP Punch-down type

Part No.	Description
KJ28-C6-US-XX	CAT6 UTP, component-rated, punch-down type

180° Keystone Jack

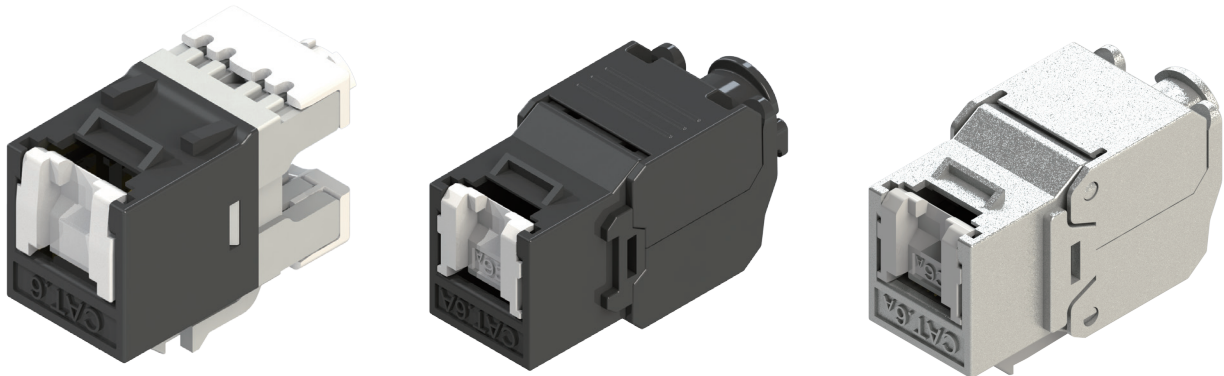

Features

- UL safety listed
- DELTA and ETL verified CAT6 and CAT6A component-rated performance
- DELTA PoE plus 30W IEC60512-99-001 verified
- IEC60512-99-002 PoE type III 60W and IV 100W capability
- IEEE802.3bt type III and IV application
- Power over HDBaseT (PoHDBaseT - up to 100W)
- High quality connectors ensure system reliability and stability by automation line
- IEC60603-7 dimensions and structural reliability complied
- Fits 1U 24-Port keystone panel
- Suitable for JE easy crimping tool , JE P/N: ETC-A
- L x W x H: 37.8 x 16.0 x 22.7mm
- Dust-prevent shutter

UTP Punch-down type

Part No.	Description
KJ88-C6-US-XX-D	CAT6 UTP, component-rated, dust-prevent shutter


UTP Tool-less type

Part No.	Description
KJ88F-C6-US-XX-D	CAT6 component-rated, accepts 23-26AWG, dust-prevent shutter
KJ88F-C6A-US-XX-D	CAT6A component-rated, accepts 23-26AWG, dust-prevent shutter

FTP Tool-less type

Part No.	Description
KJ88F-C6-FS-D	CAT6 component-rated, accepts 23-26AWG, dust-prevent shutter
KJ88F-C6A-FS-D	CAT6A component-rated, accepts 23-26AWG, dust-prevent shutter

90° Keystone Jack

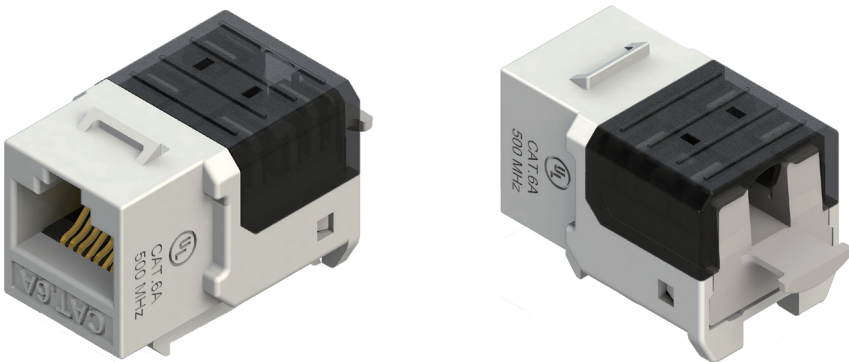

Features

- UL safety listed
- IEC60512-99-002 PoE type III 60W and IV 100W capability
- IEEE802.3bt type III and IV application
- Power over HDBaseT (PoHDBaseT - up to 100W)
- IEC60603-7 dimensions and structural reliability complied
- Accepts copper wire gauge 23AWG to 26AWG
- Accepts cable O.D. 5.0 to 8.0mm
- High quality connectors ensure system reliability and stability by full automation line
- L x W x H: 34.0 x 18.0 x 22.0mm
- Fits JE 1U 24-Port, 1U 48-Port and 0.5U 24-Port keystone panel
- Suitable for 110 punch-down tool

Punch-down type

Part No.	Description
KJ32-C6-US-XX	CAT6 UTP, component-rated, punch-down type
KJ32-C6A-US-XX	CAT6A UTP, component-rated, punch-down type


• Suitable for 110 punch-down tool

Tool-less type

Part No.	Description
KJ32F-C6-US	CAT6 UTP, component-rated, tool-less type
KJ32F-C6A-US	CAT6A UTP, component-rated, tool-less type

• Suitable for easy crimping tool, P/N: ETC-B

90° Keystone Jack

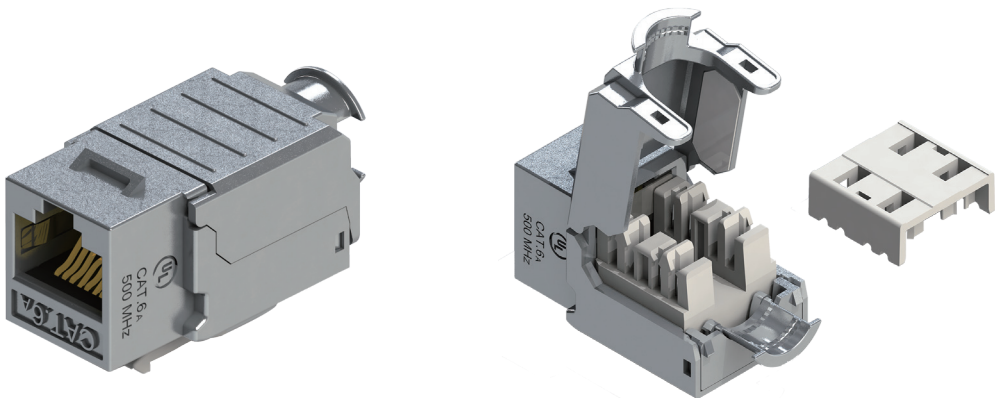

Features

- UL safety listed
- IEC60512-99-002 PoE type III 60W and IV 100W capability
- IEEE802.3bt type III and IV application
- Power over HDBaseT (PoHDBaseT - up to 100W)
- IEC60603-7 dimensions and structural reliability complied
- Accepts copper wire gauge 23AWG to 26AWG
- Accepts cable O.D. 5.0 to 8.0mm
- High quality connectors ensure system reliability and stability by full automation line
- L x W x H: 34.0 x 18.0 x 22.0mm
- Fits JE 1U 24-Port, 1U 48-Port and 0.5U 24-Port keystone panel

Punch-down type

Part No.	Description
KJ32-C6-FS	CAT6 FTP, component-rated, punch-down type
KJ32-C6A-FS	CAT6A FTP, component-rated, punch-down type


• Suitable for 110 punch-down tool

Tool-less type

Part No.	Description
KJ32F-C6-FS	CAT6 FTP, component-rated, tool-less type
KJ32F-C6A-FS	CAT6A FTP, component-rated, tool-less type

• Suitable for easy crimping tool, P/N: ETC-B

Slim Type 90° Keystone Jack

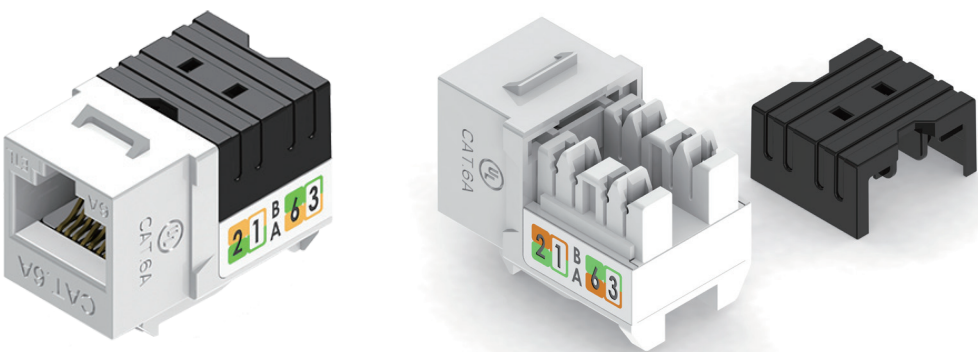

Features

- UL safety listed
- IEC60512-99-002 PoE type III 60W and IV 100W capability
- IEEE802.3bt type III and IV application
- Power over HDBaseT (PoHDBaseT - up to 100W)
- IEC60603-7 dimensions and structural reliability complied
- Accepts copper wire gauge 23AWG to 26AWG
- Accepts cable O.D. 5.0 to 8.0mm
- High quality connectors ensure system reliability and stability by full automation line
- L x W x H: 27.9 x 16.5 x 21.5mm
- Fits for Leviton Decora® wall plates
- Fits JE 1U 24-Port, 1U 48-Port and 0.5U 24-Port keystone panel
- Suitable for 110 punch-down tool

Part No.	Description
KJ38-C6-US	Slim type, CAT6 UTP, component-rated, punch-down type
KJ38-C6A-US	Slim type, CAT6A UTP, component-rated, punch-down type




Full Automation Line

In-line Coupler - Keystone Jack Type


Features

- ETL verified CAT6A channel performance
- UL safety listed
- IEC60512-99-002 PoE type III 60W and IV 100W capability
- IEEE802.3bt type III and IV application
- Power over HDBaseT (PoHDBaseT - up to 100W)
- IEC60603-7 dimensions and structural reliability complied
- Fits for JE 1U 24-Port keystone jack flat panel
- High quality connectors ensure system reliability and stability by automation line

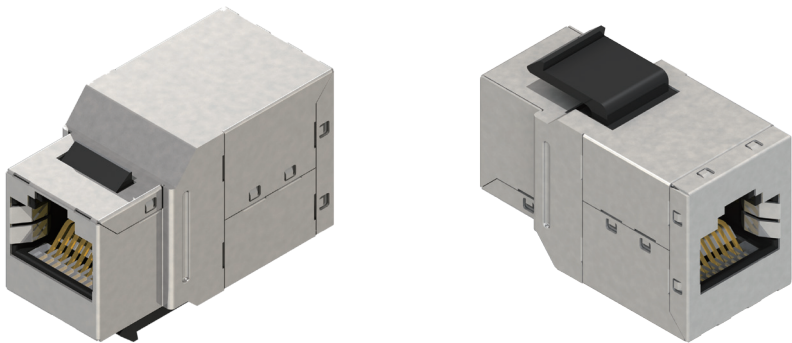

Part No.	Description
KJ9AS-C6	CAT6 FTP, in-line coupler keystone type
KJ9AS-C6A	CAT6A FTP, in-line coupler keystone type


- L x W x H: 35.2 x 17.1 x 24.5mm
- This in-line coupler is not suitable for V angled keystone panel

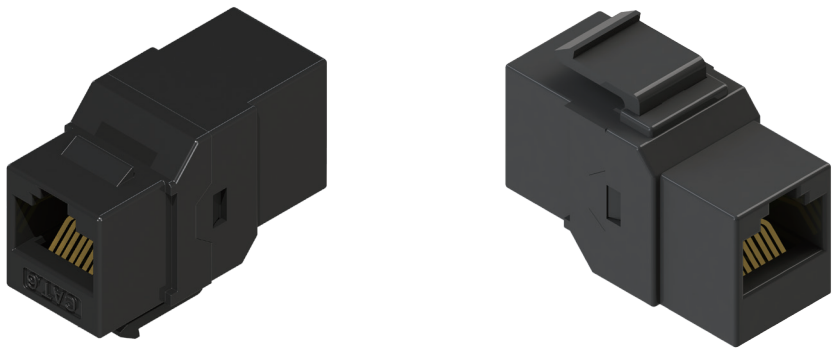

Part No.	Description
KJ9A-C6	CAT6 UTP, in-line coupler keystone type

- L x W x H: 35.0 x 16.3 x 24.7mm
- This in-line coupler is not suitable for V angled keystone panel

Pre-Terminated Copper Trunk Assembly

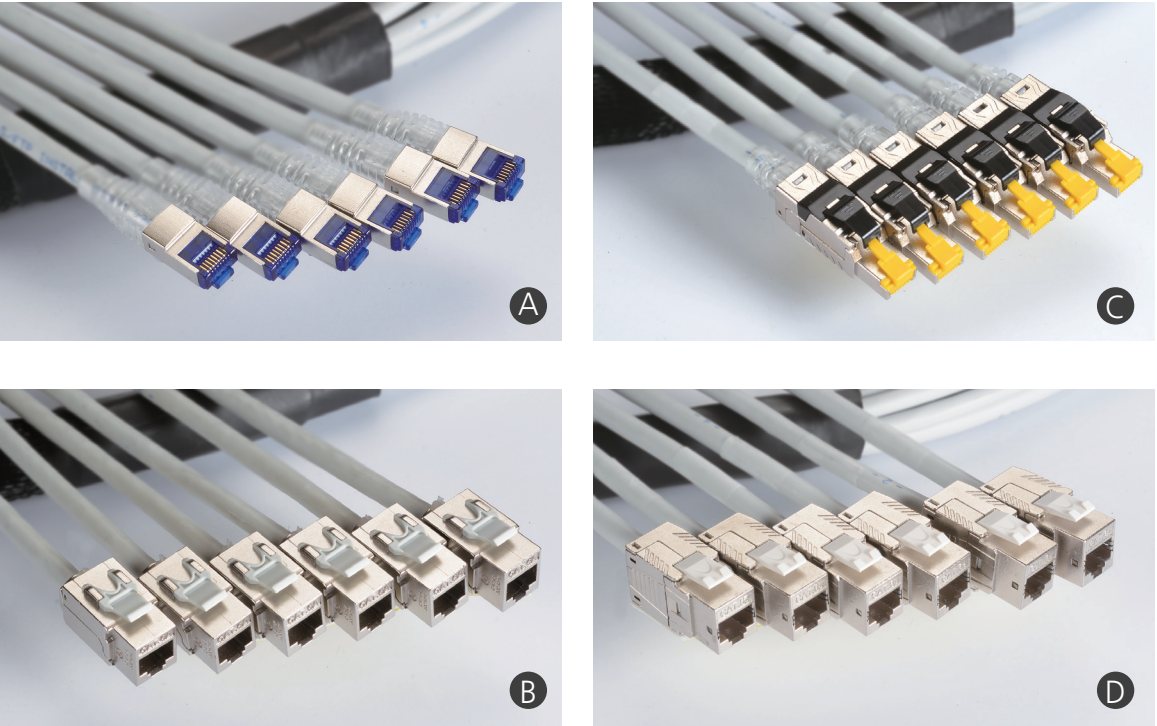


Features

- CAT8 design to support Ethernet at rates up to 40 Gbps (40GBASE-T) and 25Gbps(25GBASE-T) over distances up to 30 meters for switch-to-server connections in data center
- Power over HDBaseT (PoHDBaseT - up to 100W)
- High quality connectors ensure system reliability and stability
- Private ID serial number is on each trunk cable
- Cable assemblies are tested to help ensure that every installation is efficient
- 100% Fluke tested each cord
- 100% AOI inspection on each crimped plug
- IEC60603-7 dimensions and structural reliability complied
- CM / CMR, LSZH (IEC60332-1-2 / IEC 60332-3-24) and CM-LSZH dual rated jacket are available
- Braided mesh sleeve keeps the cable neat and promotes better airflow

	Description
A	6ports Trunk assembly, CAT6A SFTP 23AWG solid wires cable, solid wire plug
B	6ports Trunk assembly, CAT6A SFTP 23AWG solid wires cable, KJ32
C	6ports Trunk assembly, CAT6A SFTP 23AWG solid wires cable, field Term. plug
D	6ports Trunk assembly, CAT8 SFTP 22AWG solid wires cable, field Term. plug
	6ports Trunk assembly, CAT6A SFTP 23AWG solid wires cable, KJ58
	6ports Trunk assembly, CAT8 SFTP 22AWG solid wires cable, KJ58

• Length available: 5M to 90M

CAT8 Factory Manufacture Patch Cord

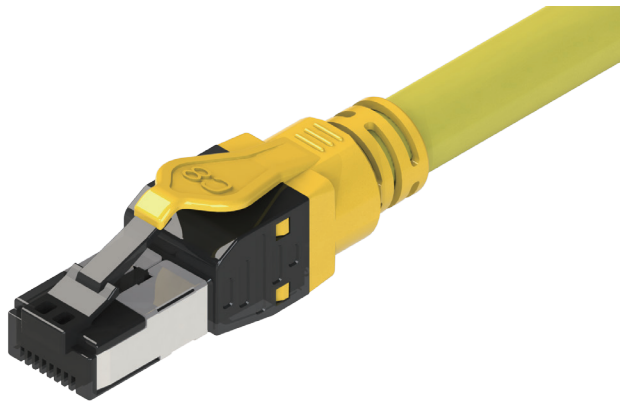

Features


- GHMT verified CAT8 channel performance
- GHMT verified IEC60512-99-002 PoE type III 60W and type IV 100W capability
- Support Ethernet at rates up to 40 Gbps (40GBASE-T) and 25Gbps(25GBASE-T) over distances up to 30 meters for switch-to-server connections in data center
- Power over HDBaseT (PoHDBaseT - up to 100W)
- IEC60603-7 and IEC61935-2 dimensions and structural reliability complied
- Cable assemblies are 100% Fluke tested to help ensure every installation is efficient
- High quality connectors ensure system reliability and stability by press-fit assembly process
- CM / CMR, LSZH (IEC60332-1-2 / IEC 60332-3-24) and CM-LSZH dual rated jacket are available

Part No.	Description
FPM-C8-FS-S22-XX	CAT8 FTP, factory manufacture plug, CAT8 22AWG solid copper wires
FPM-C8-FS-T24-XX	CAT8 FTP, factory manufacture plug, CAT8 24AWG stranded copper wires

• Length available: 1M to 5M

Copper Patch Cord

24-26AWG series

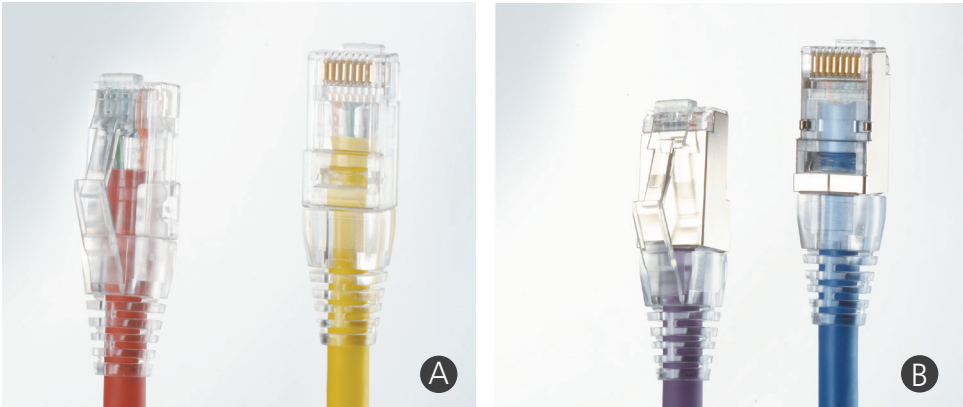

SR type: SR-V86

SR type: SR-V86

Features


- CAT6 and CAT6A patch cord component-rated and channel performance
- CAT 6A patch cord provides exceptional alien crosstalk (AXT) suppression
- UL444-LP 192 cables 0.5A and TSB-184-A 37cables 100W
- IEC60512-99-002 POE type III 60W and IV 100W capability
- Bare copper material for cable conductors.
- CM, LSZH (IEC60332-1-2 / IEC 60332-3-24) and CM-LSZH dual rated jacket are available
- IEC60603-7 and IEC61935-2 dimensions and structural reliability complied
- PC UL94V-0 or V-2 for plug material, Min. 50micro-inch gold plating on plug contact area
- Clear color boot

	Description
A	CAT6 UTP patch cord, 24AWG, SR-V86 clear boot
B	CAT6 F/UTP patch cord, 26AWG, SR-V86 clear boot
	CAT6 U/FTP patch cord, 26AWG, SR-V86 clear boot
	CAT6 S/FTP patch cord, 26AWG, SR-V86 clear boot
	CAT6A F/UTP patch cord, 26AWG, SR-V86 clear boot
	CAT6A F/UTP patch cord, 26AWG, SR-V86 clear boot, UTP Plug
	CAT6A U/FTP patch cord, 26AWG, SR-V86 clear boot
	CAT6A S/FTP patch cord, 26AWG, SR-V86 clear boot
	CAT7 S/FTP patch cord, 26AWG, SR-V86 clear boot

• Length available: 0.5M to 20M

Copper Patch Cord

28AWG series

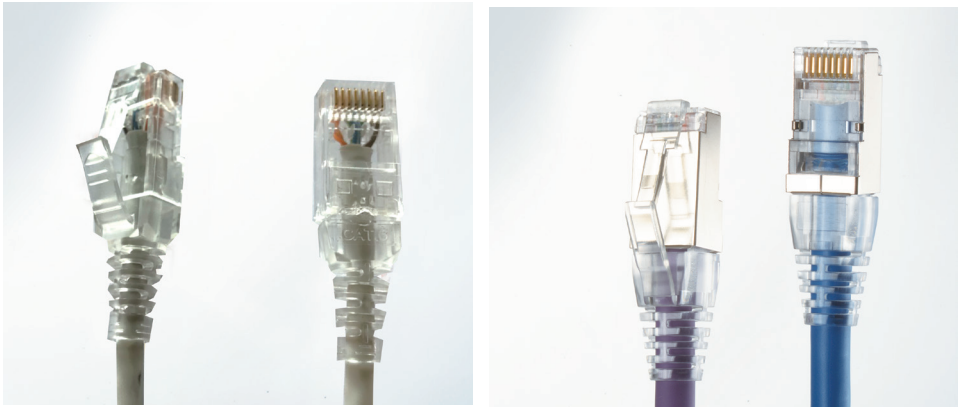

SR type: SR-V96

SR type: SR-V86

Features

- CAT6 and CAT6A patch cord component-rated performance
- CAT 6A patch cord provides exceptional alien crosstalk (AXT) suppression
- The cable Insertion Loss de-rating vector less than 1.9
- UL444-LP 192 cables 0.3A and TSB-184-A 37cables 60W
- IEC60512-99-002 POE type III 60W and IV 100W capability
- Bare copper material for cable conductors
- CM, LSZH (IEC60332-1-2 / IEC 60332-3-24) and CM-LSZH dual rated jacket are available
- IEC60603-7 and IEC61935-2 dimensions and structural reliability complied
- PC UL94V-0 or V-2 for plug material, Min. 50micro-inch gold plating on plug contact area
- Clear color boot

Description
CAT6 UTP patch cord, 28AWG, SR-V96 clear boot
CAT6 U/FTP patch cord, 28AWG, SR-V86 clear boot
CAT6A U/FTP patch cord, 28AWG, SR-V86 clear boot
CAT6A U/FTP patch cord, 28AWG, SR-V86 clear boot, UTP plug

• Length available: 0.5M to 10M

Copper Patch Cord

Feed through series



Features

- Perfect CAT5E and CAT6 performance
- Low labor cost by easily and quickly assembly
- Crimping tool available

Description

Feed through plug:
CAT5E UTP plug, 1 piece type
CAT6 UTP plug, 1 piece type
Patch cord:
CAT5E UTP patch cord, feed through plug, component-rated and channel performance
CAT6 UTP patch cord, feed through plug, component-rated and channel performance

• Length available: 0.5M to 20M

Easy Tool to Crimp




Features

- Light weight by plastic material design
- Economic solution for keystone jack and field Term. plug installation

Part No.	Description
ETC-A	Black Die color, for KJ18F, KJ28F, KJ36F and KJ88F
ETC-B	Yellow Die color, for KJ32F and FP series Plug
ETC-C	Grey Die color, for KJ58F

• Length available: 1M to 5M

High Density Snap-in Keystone Panel

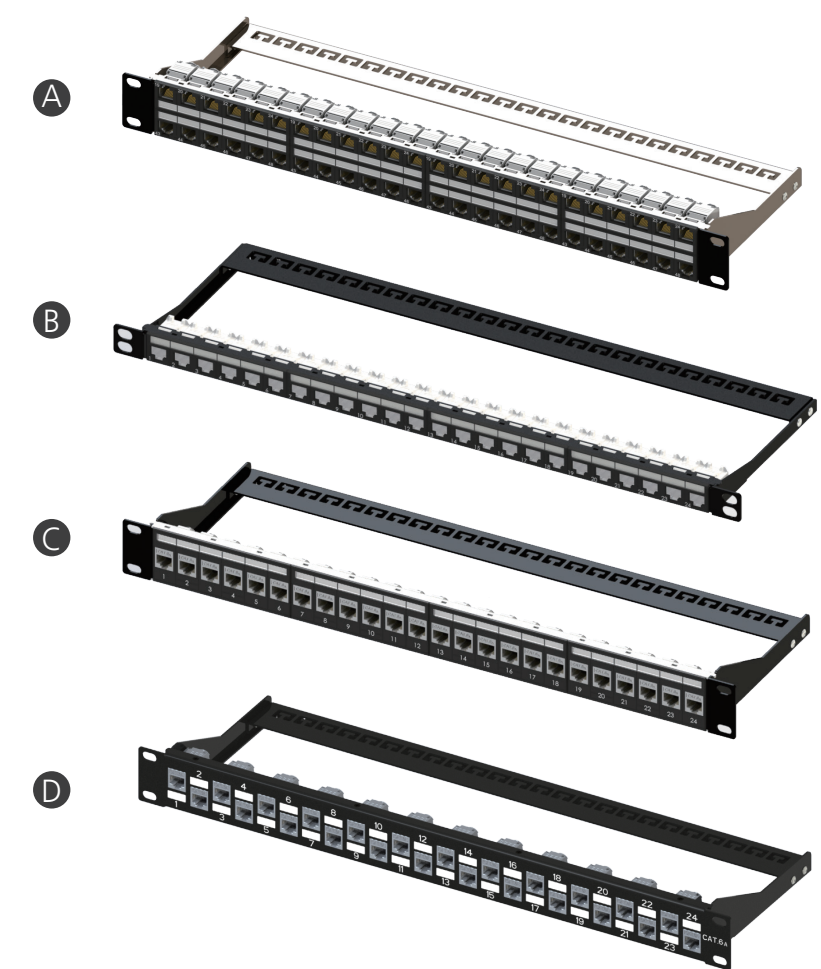

Part No.	Description
A	
HPPKJ48	1U 48-Port keystone panel, UTP type
HPPKJF48	1U 48-Port keystone panel, FTP type
Accepts keystone jack type: KJ32, KJ32F, KJ28, KJ38, KJ58F	
B	
HPPKJ24	0.5U 24-Port keystone panel, UTP type
HPPKJF24	0.5U 24-Port keystone panel, FTP type
Accepts keystone jack type: KJ28, KJ32, KJ32F, KJ38	
C	
PPKJ24	1U 24-Port keystone panel, UTP type
PPKJF24	1U 24-Port keystone panel, FTP type
Accepts keystone jack type: KJ18, KJ18F, KJ28, KJ28F, KJ32, KJ32F, KJ36F, KJ38, KJ58F, KJ88F, KJ9A, KJ9AS	
D	
PKJF24	1U 24-Port keystone panel, staggered port, FTP type
Accepts keystone jack type: KJ18, KJ18F, KJ28, KJ28F, KJ32, KJ32F, KJ36F, KJ38, KJ58F, KJ88F, KJ9A, KJ9AS	

* The keystone jacks were not included in above items

Foldable Angled Keystone Panel






Features

- High-density angled panel eliminates need for horizontal managers, allowing patch cords to flow directly into vertical management
- Saving 60% room for stock, package and transportation
- Front panel is optional with solid steel or plastic panel

Part No.	Description
A	Package size L x W x H: 285 x 85 x 55mm
VKJ24	Foldable 1U 24-Port keystone jack panel, UTP type, solid steel front panel
VKJF24	Foldable 1U 24-Port keystone jack panel, FTP type, solid steel front panel
Accepts keystone jack type: KJ18, KJ18F, KJ28, KJ28F, KJ32, KJ32F, KJ36F, KJ38, KJ58F and KJ88F	
B	Package size L x W x H: 285 x 85 x 110mm
VKJ48	Foldable 2U 48-Port keystone jack panel, UTP type, solid steel front panel
VKJF48	Foldable 2U 48-Port keystone jack panel, FTP type, solid steel front panel
Accepts keystone jack type: KJ18, KJ18F, KJ28, KJ28F, KJ32, KJ32F, KJ36F, KJ38, KJ58F and KJ88F	
C	Package size L x W x H: 285 x 85 x 65mm
HVKJ48	Foldable 1U 48-Port keystone jack panel, UTP type, solid steel front panel
HVKJF48	Foldable 1U 48-Port keystone jack panel, FTP type, solid steel front panel
Accepts keystone jack type: KJ32, KJ32F, KJ28, KJ38, KJ58F	
In-line coupler KJ9A, KJ9AS were not suitable for angled keystone panel	

* The keystone jacks were not included in above items

UTP PCB Module Patch Panel

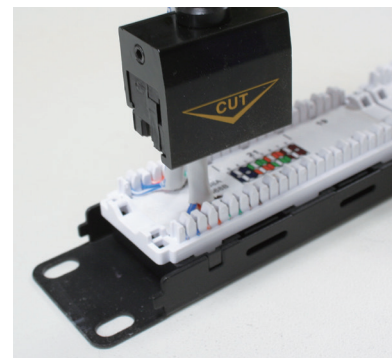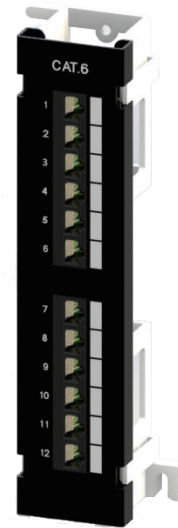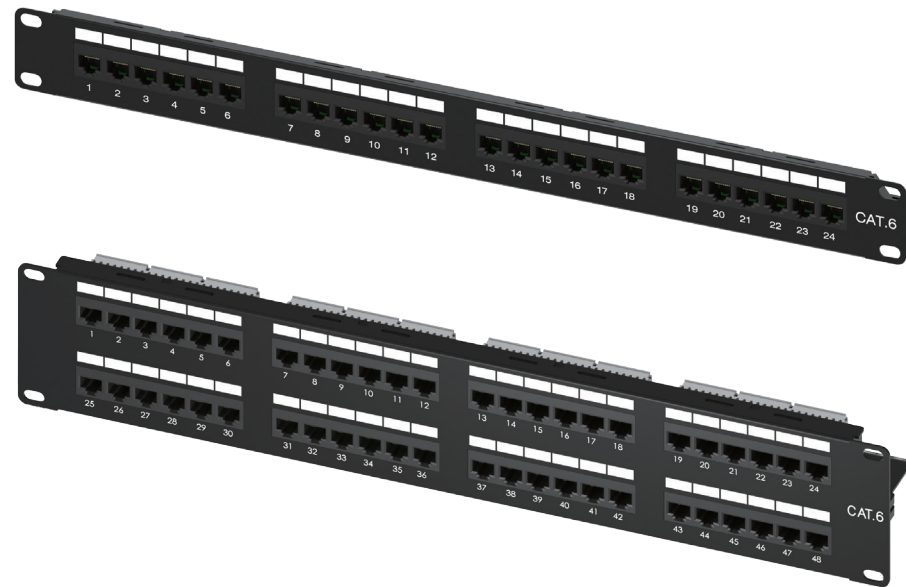



5-pair punch down tool

Features

- High headroom on CAT6 permanent link performance
- UL safety listed
- IEC60512-99-002 PoE type III 60W and IV 100W capability
- IEEE802.3bt type III and IV application
- Power over HDBaseT (PoHDBaseT - up to 100W)
- IEC60603-7 dimensions and structural reliability complied
- Accepts copper wire gauge 23AWG to 26AWG
- Standard 110 IDC works with 5-pair punch down tool
- High quality connectors ensure system reliability and stability by automation line

Part No.	Description
II PN24T-C6	CAT6 UTP Patch panel, 19" 1U 24-Port, modular type
II PN48T-C6	CAT6 UTP Patch panel, 19" 2U 48-Port, modular type
II PNMV12T-C6	CAT6 Patch panel, modular type, mini vertical 12-Port, wall mounted with 89D bracket



CAT8 22AWG S/FTP solid wires

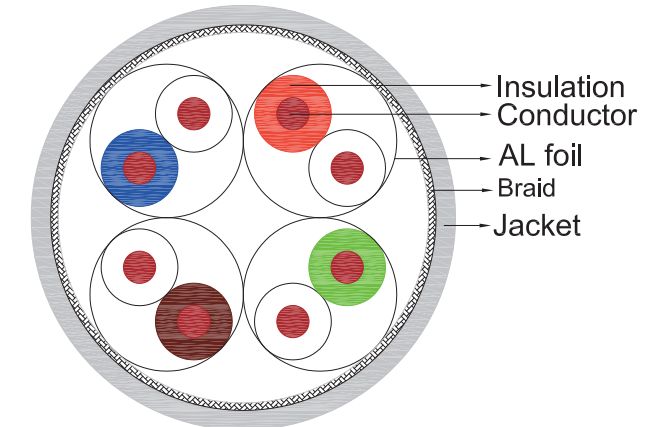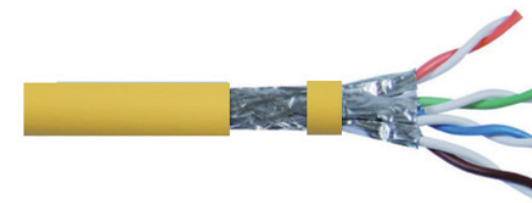

Features

- GHMT CAT8 channel performance verified
- Complied with the IEC61156-9 CAT8.2 cable requirement
- IEEE802.3bt PoE type III 60W and IV 100W applications
- 22AWG solid copper wire, Skin-Foam-Skin Polyethylene isolation OD 1.64mm
- Aluminum foil around each pair, Tin plated copper braid for overall screen
- CM, LSZH (IEC60332-1-2 / IEC 60332-3-24) and CM-LSZH dual rated jacket are available
- OD 8.4mm
- 305meters or 500meters in wooden reel


CAT8 24AWG S/FTP stranded wires

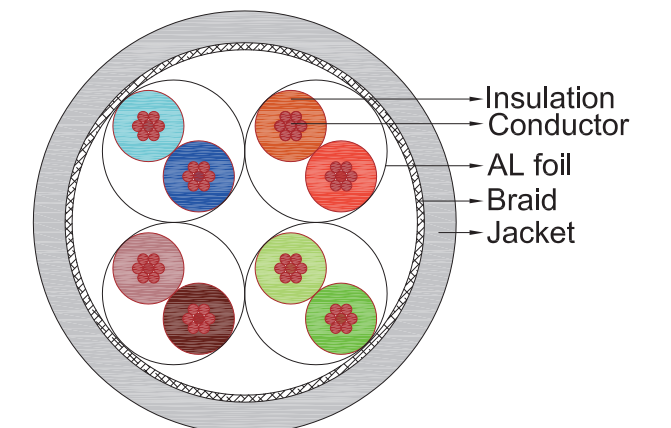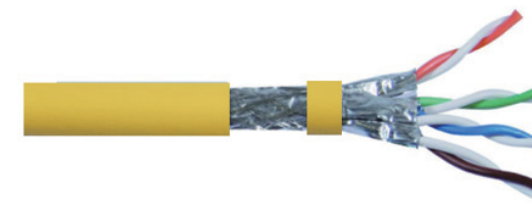

Features

- GHMT CAT8 channel performance verified
- Complied with the IEC61156-10 CAT8.1 cable requirement
- IEEE802.3bt PoE type III 60W and IV 100W applications
- 24AWG stranded copper wire, Skin-Foam-Skin Polyethylene isolation OD 1.40mm
- Aluminum foil around each pair, Tin plated copper braid for overall screen
- CM, LSZH (IEC60332-1-2 / IEC 60332-3-24) and CM-LSZH dual rated jacket are available
- OD 7.4mm
- 305meters or 500meters in wooden reel


CAT7A 23AWG S/FTP solid wires

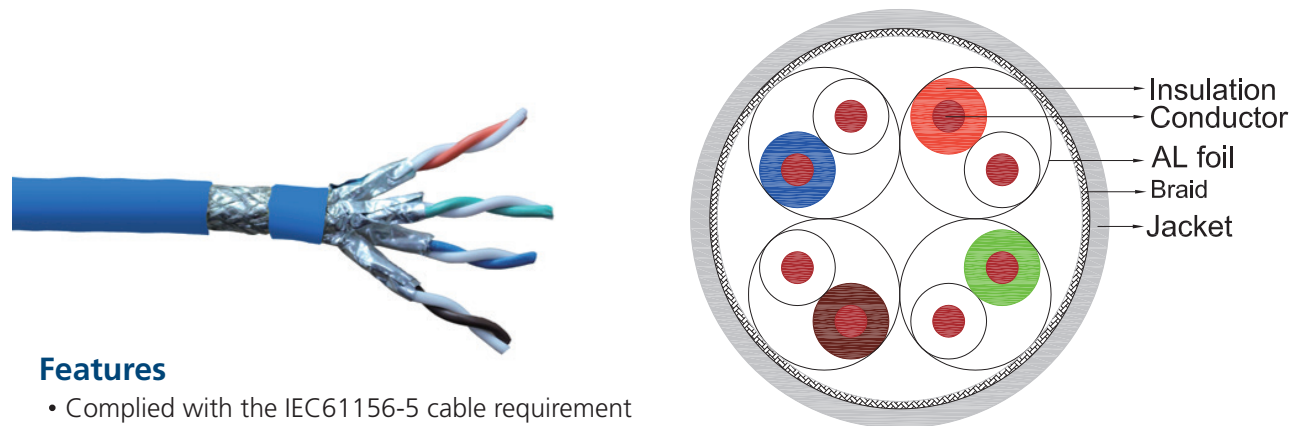

Features

- Complied with the IEC61156-5 cable requirement
- IEEE802.3bt PoE type III 60W and IV 100W applications
- 23AWG solid copper wire, Skin-Foam-Skin Polyethylene isolation OD 1.34 mm
- Aluminum foil around each pair, Tin plated copper braid for overall screen
- CM, LSZH (IEC60332-1-2 / IEC 60332-3-24) and CM-LSZH dual rated jacket are available
- OD 7.3 mm
- 305meters or 500meters in wooden reel


CAT6A UTP 23AWG solid wires

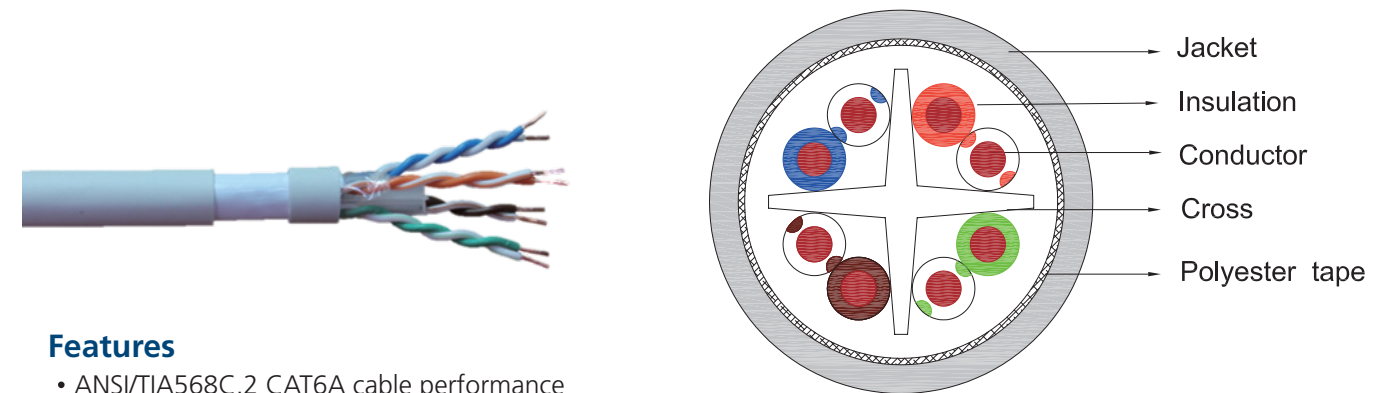

Features

- ANSI/TIA568C.2 CAT6A cable performance
- UTP cable structure with special isolation element in polyester tape
- IEEE802.3bt PoE type III 60W and IV 100W applications
- 23AWG solid copper wires, Polyethylene isolation OD 1.14 mm
- CM, LSZH (IEC60332-1-2 / IEC 60332-3-24) and CM-LSZH dual rated jacket are available
- OD 7.5 mm
- 305meters or 500meters in wooden reel


CAT7 23AWG S/FTP solid wires

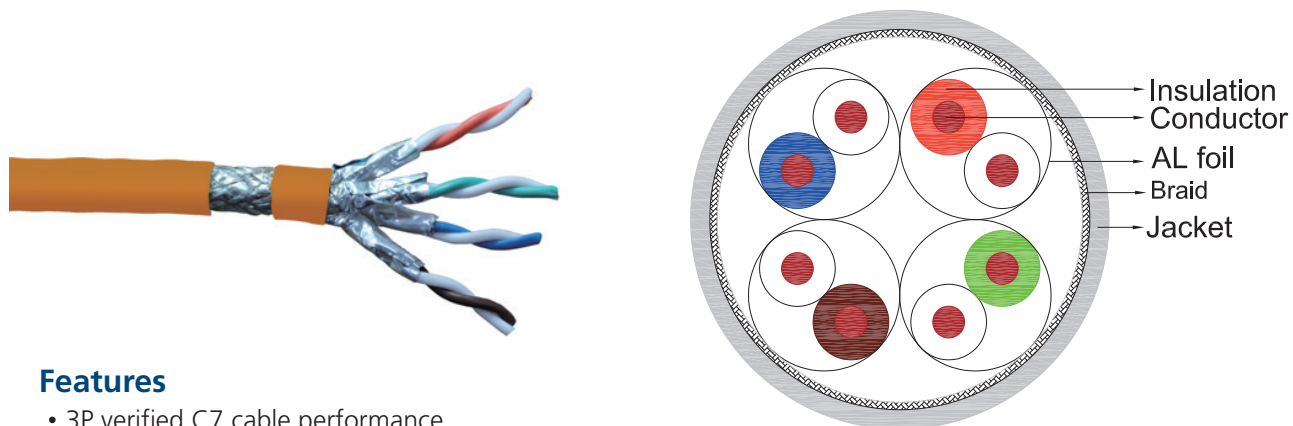

Features

- 3P verified C7 cable performance
- Complied with the IEC61156-5 cable requirement
- IEEE802.3bt PoE type III 60W and IV 100W applications
- 23AWG solid copper wire, Skin-Foam-Skin Polyethylene isolation OD 1.34 mm
- Aluminum foil around each pair, Tin plated copper braid for overall screen
- CM, LSZH (IEC60332-1-2 / IEC 60332-3-24) and CM-LSZH dual rated jacket are available
- OD 7.3 mm
- 305meters or 500meters in wooden reel

CAT6A U/FTP 23AWG solid wires

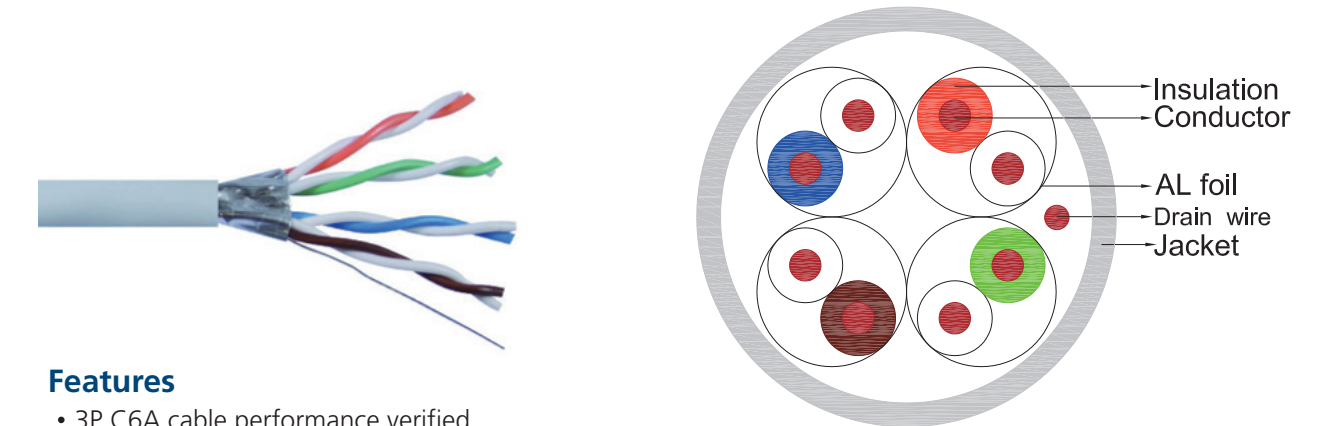

Features

- 3P C6A cable performance verified
- Complied with the IEC61156-5 cable requirement
- IEEE802.3bt PoE type III 60W and IV 100W applications
- 23AWG solid copper wire, Skin-Foam-Skin Polyethylene isolation OD 1.34 mm
- Aluminum foil around each pair, Tin plated copper drain wire
- CM, LSZH (IEC60332-1-2 / IEC 60332-3-24) and CM-LSZH dual rated jacket are available
- OD 7.3 mm
- 305meters or 500meters in wooden reel

CAT6A Channel Configuration



According to ANSI/TIA 568C.2

ID	Description
A	Cables and cords Work area cord
C, D	Patch cord / Equipment cord
B	Horizontal cabling
TO	Connecting hardware Telecommunications outlet
C1, C2	Horizontal cross-connect or Interconnect
Max. 10m	Maximum length A+C+D
Max. 90m	B

C6A UTP channel

ID	Description
A, C, D	CAT6A F/UTP 26AWG patch cord, UTP plug, 1 to 10m, see page 43
B	CAT6A UTP 23AWG solid wires horizontal cable with special isolation element
TO, C1, C2	CAT6A UTP keystone jack, JE P/N KJ28, KJ32, KJ38, KJ88F and KJ9A are available

Wall plate, 12 port, JE P/N: JE334-12/XX

1U 24port FTP Keystone Panel, staggered port, JE P/N: PKJF24


C6A FTP channel

ID	Description
A, C, D	CAT6A F/UTP 26AWG patch cord, STP plug, 1 to 10m, see page 43
B	CAT6A U/FTP 23AWG solid wires horizontal cable
TO, C1, C2	CAT6A FTP keystone jack, JE P/N KJ28, KJ32, KJ38, KJ88F and KJ9AS are available

Wall plate, 12 port, JE P/N: JE334-12/XX

1U 24port FTP Keystone Panel, staggered port, JE P/N: PKJF24

CAT.7 Channel Configuration

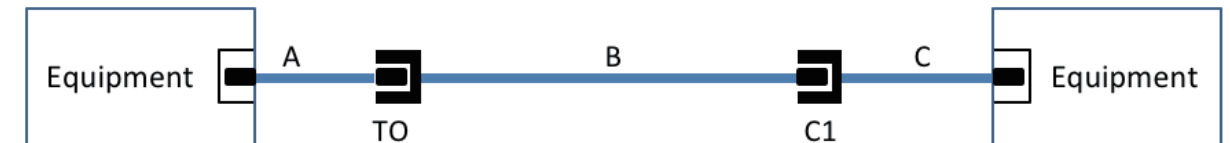


According to ANSI/TIA 568C.2

ID	Description
A	Cables and cords Work area cord
C	Patch cord / Equipment cord
B	Horizontal cabling
TO	Connecting hardware Telecommunications outlet
C1	Horizontal cross-connect or Interconnect
Max. 10m	Maximum length A+C
Max. 90m	B


C6A UTP channel

ID	Description
A, C	CAT7 S/FTP 26AWG stranded wires patch cord, 1 to 10m, see page 43
B	CAT7 S/FTP 23AWG solid wires horizontal cable
TO, C1	CAT7 FTP keystone jack, JE P/N: KJ28F-C7-FS-22

Freq. tested up to 1000MHz

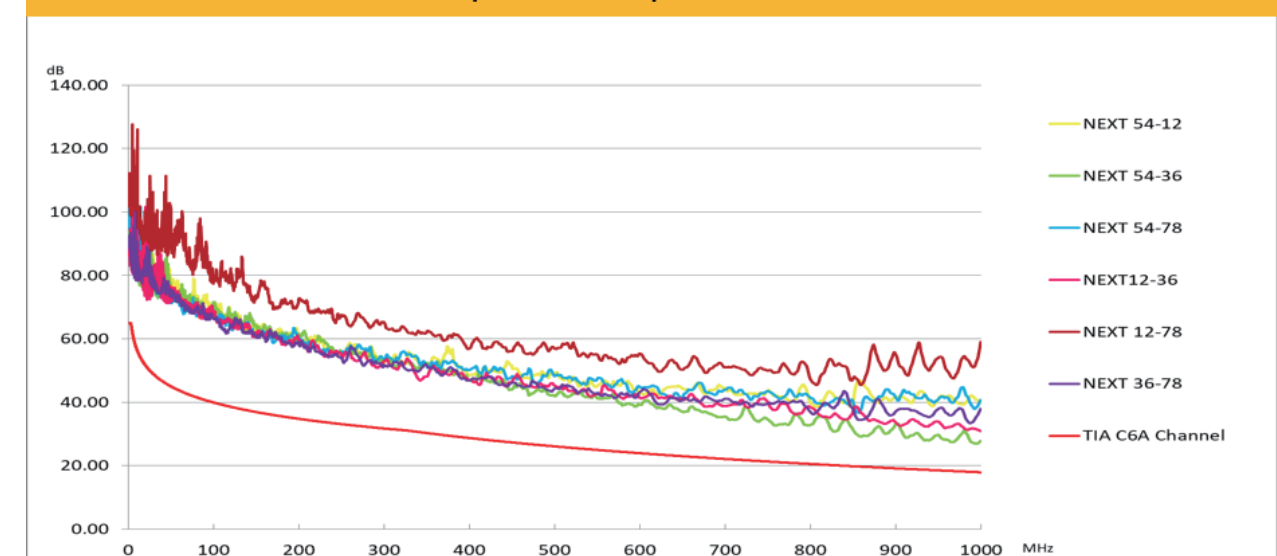

28AWG Channel Configuration

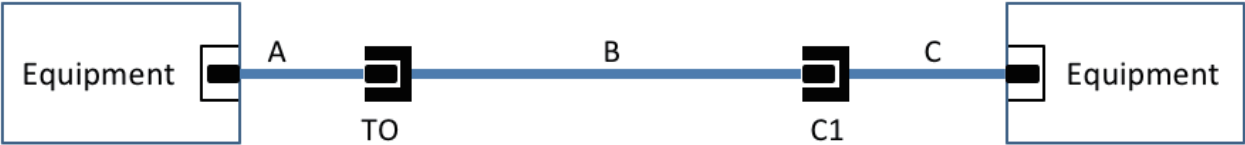

According to ANSI/TIA 568.2-D

ID	Description
Cables and cords	
A	Work area cord
C	Patch cord / Equipment cord
B	Horizontal cabling
Connecting hardware	
TO	Telecommunications outlet
C1	Horizontal cross-connect or Interconnect
Maximum length	
Max. 10m	A+C
Max. 90m	B

Table 1

The channel length information at 20℃		
Length of 28AWG patch cord(meters)	Maximum permanent link length 23AWG (meters)	Maximum channel length(meters)
6	90	96
10	83	93
28 AWG (meters)		
6	40	46
10	40	50

28AWG Products Information

CAT6 UTP

ID	Products description
A, C	CAT6 UTP patch cord, 28AWG stranded wires, 1 to 10m
B	CAT6 horizontal cable: CAT6 UTP 23AWG solid wires 90m, or CAT6 UTP 28AWG solid wires 40m
TO, C1	For 28AWG solid wires: CAT6 UTP Tool-free keystone jack 28AWG type, JE P/N: KJ28F-C6-US-XX-28

CAT6 STP

ID	Products description
A, C	CAT6 U/FTP patch cord, 28AWG stranded copper wires, 1 to 10m
B	CAT6 horizontal cable: CAT6 U/FTP 23AWG solid wires 90m, or CAT6 U/FTP 28AWG solid wires 40m
TO, C1	For 28AWG solid wires: CAT6 FTP Tool-free keystone jack 28AWG type, JE P/N: KJ28F-C6-FS-28

CAT6A UTP

ID	Products description
A, C	CAT6 U/FTP patch cord, 28AWG copper wires, UTP plug, 1 to 10m
B	CAT6A horizontal cable: CAT6A UTP 23AWG solid wires with special isolation element, 90m, or CAT6A U/FTP 28AWG solid wires, 40m
TO, C1	For 28AWG solid wires: CAT6 UTP Tool-free keystone jack 28AWG type, JE P/N: KJ28F-C6A-US-XX-28

CAT6A STP

ID	Products description
A, C	CAT6A U/FTP patch cord, 28AWG stranded copper wires, 1 to 10m
B	CAT6A horizontal cable: CAT6A U/FTP 23AWG solid wires 90m, or CAT6A U/FTP 28AWG solid wires 40m
TO, C1	For 28AWG solid wires: CAT6A FTP Tool-free keystone jack 28AWG type, JE P/N: KJ28F-C6A-FS-28