


Technical Data Sheet

180 ° Cat.6_A STP Keystone Jack, Tool-Free, GHMT PVP

PATENTED

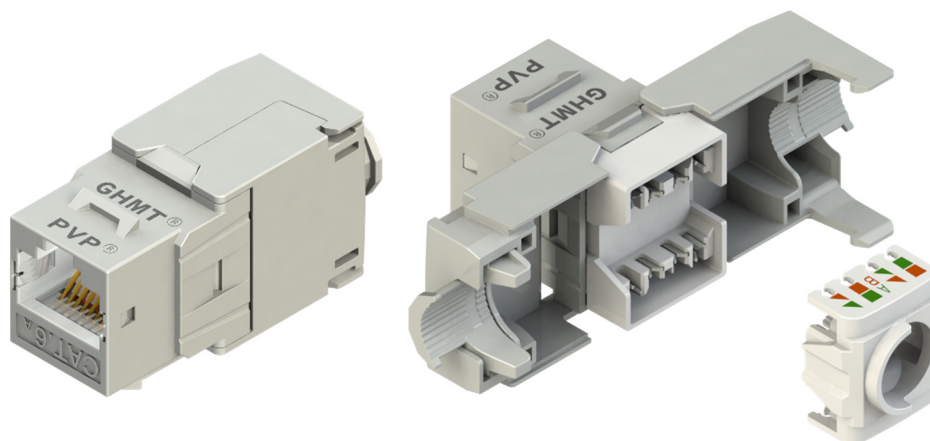

Features

- High-Density design for 1U-48port keystone panel, extreme performance design for Hyper-Scale and Edge Data Center
- GHMT PVP(PREMIUM Verification Program) verified ISO/IEC 11801-1 and IEC 60603-7-51 Cat.6_A Connecting-Hardware including the 4PPoE performance
- 100% Cat.6_A performance tested in factory
- Perfect EMC performance by the full shielded of zinc Die-Casting material and grounding block design
- Easy and Tool-Free in field termination, T568A & B wiring
- Power over HDBaseT (PoH) applications up to 100 watts
- UL 1863 verified

Standards Compliance

- ANSI/TIA-568.2-D
- ISO/IEC 11801-1
- IEC 60603-7-51
- IEC 60603-7-1
- IEC 60512-99-002
- EN 50173-1
- IEEE 802.3bt Type 4 PoE++ (4PPoE) 100 watts
- ANSI/TIA-1096-A (formerly FCC Part 68)
- UL1863
- RoHS / REACH compliant

Part Number

AADBG 32116 00015

Descriptions

KJ58F-C6A-PVP 180 ° Cat.6_A STP Keystone Jack, Tool-Free, GHMT PVP


Packing Information

- 1 keystone jack, 1 IDC-Cap, 1 copper foil sticker & 1 Cable-Tie per bag
- 50 bags and 1 Installation-Instruction per box
- 10 boxes per carton (500pcs / carton)
- Net weight 15.7 kgs per carton
- Gross weight 16.7 kgs per carton
- Carton size L48.0 x W39.0 x H25.3cm, 1.67 CUFT, 0.047CBM

Dimensions


Unit: mm

Tolerance: ± 0.3 mm

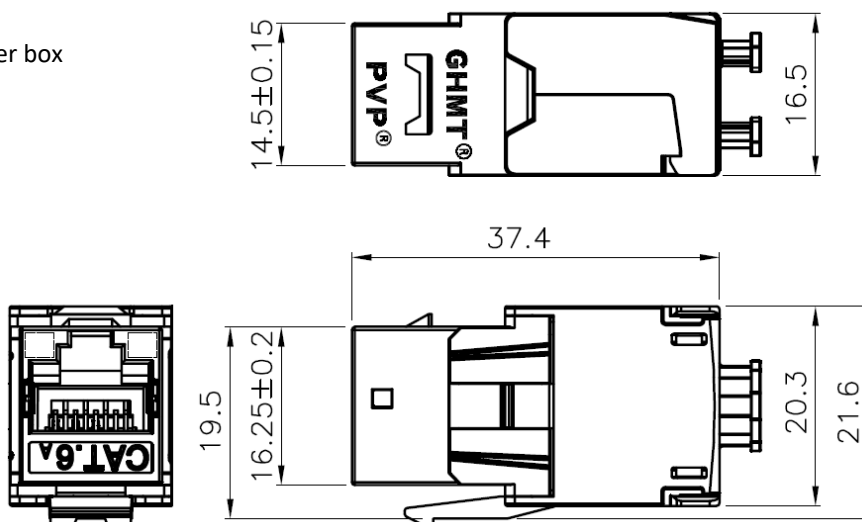

Technical Data Sheet

180 ° Cat.6A STP Keystone Jack, Tool-Free, GHMT PVP

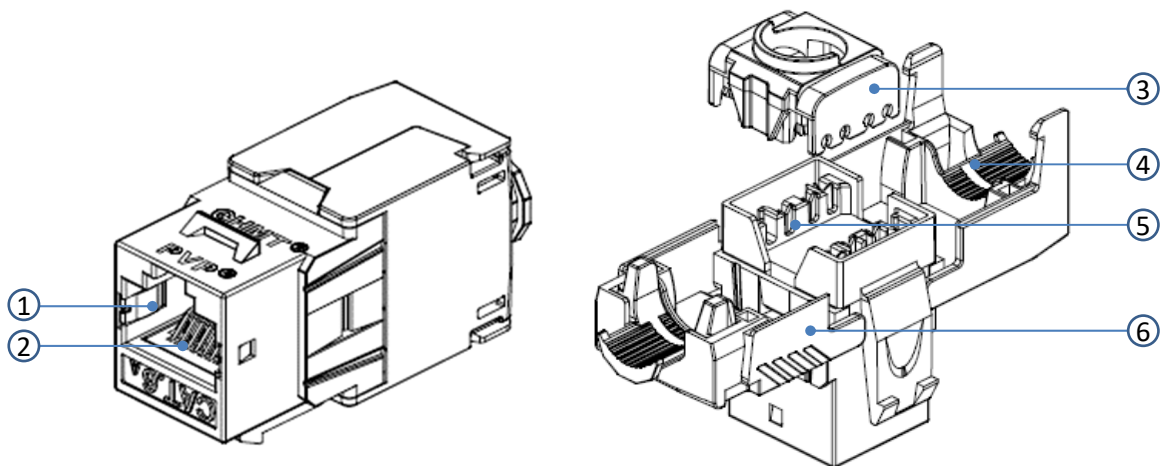

Material Specifications

Parts

1. Grounding contacts
2. RJ45 jack
 - 2-1. Housing
 - 2-2. Contacts bracket
 - 2-3. Contacts material
 - 2-4. Contacts gold plating
3. Wire management cap (IDC-Cap)
4. Grounding block
5. IDCs
 - 5-1. Housing
 - 5-2. Terminals
6. Caps
7. PCB

Specifications

Stainless steel

Zinc Die-Casting with nickel plating

Polycarbonate, UL94V-2, transparent color

Phosphor bronze with nickel plating

50 micro-inch gold plating on surface of plug contact area

Polycarbonate, UL94V-2, white color

Zinc Die-Casting with nickel plating

Polycarbonate, UL94V-2, white color

Phosphor bronze with tin plating

Zinc Die-Casting with nickel plating

FR4, UL94V-0

Mechanical Characteristics


- Life (Mating cycles) ≥ 750 cycles
- Mating / Un-mating force $\leq 30N$
- Retention strength 7.7kg between jack and plug

Mounting Dimensions

Letter	Max. mm	Min. mm
A3	19.61	19.30
C3	15.04	14.78
I3	1.54	1.22

Installation Information

- Wire conductor range Solid and stranded, 23-26AWG
- Cable OD range 5.0mm to 8.5mm
- IDC re-installing cycles ≥ 20 cycles
- Installing temperature $0^{\circ}C$ to $50^{\circ}C$ ($32^{\circ}F$ to $122^{\circ}F$)
- Storage temperature $-40^{\circ}C$ to $70^{\circ}C$ ($-40^{\circ}F$ to $158^{\circ}F$)
- Operating temperature $-10^{\circ}C$ to $60^{\circ}C$ ($14^{\circ}F$ to $140^{\circ}F$)
- Humidity 10% to 90%RH

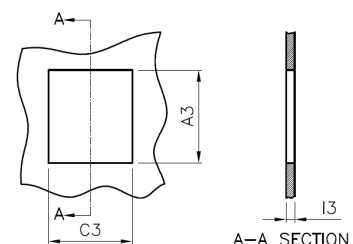

Electrical Characteristics

- Contact resistance $\leq 20 m\Omega$, from initial
- Insulation resistance $\geq 500 M\Omega$ at 100 Vd.c., for 60sec.
- Voltage proof contact to contact 1000 Vd.c., contact to shield 1500Vd.c., for 60sec.
- Current carrying capacity 1.0A at $60^{\circ}C$ ($140^{\circ}F$)
- UL voltage rating 150V
- PoE 60Vd.c., IEEE 802.3bt Type 4 PoE++ (4PPoE) 100 watts